





φ 100mm , 50-90 Ncm , 300W
 Weight : 2.3 Kg/pcs
 Stand : Option

M9480LT

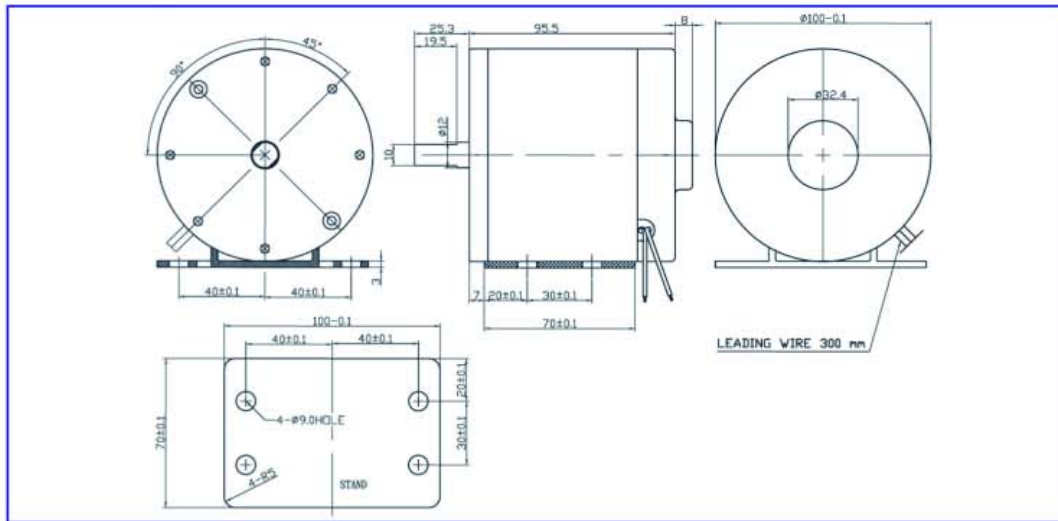

24VDC No Load 3700rpm Torque/Speed Performance Curve

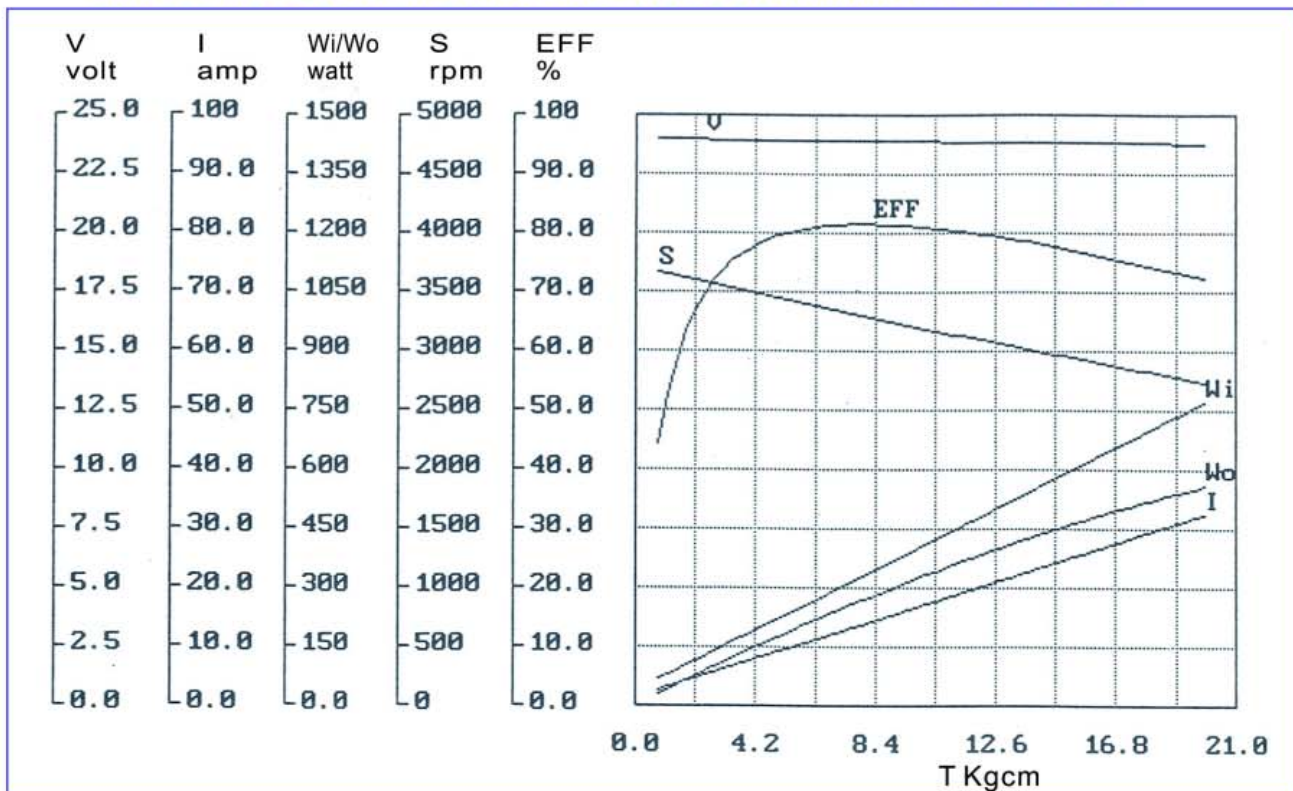

| NO | R.P.M. | VOLT (V) | I (AMP) | INPUT (W) | TORQUE (KG-CM) | OUTPUT (W) | EFF (%) |
|----|--------|----------|---------|-----------|----------------|------------|---------|
| 1 | 3660 | 23.97 | 2.86 | 68.6 | 0.80 | 30.0 | 43.7 |
| 2 | 3533 | 23.95 | 6.59 | 157.8 | 3.30 | 119.6 | 75.8 |
| 3 | 3405 | 23.94 | 10.40 | 249.0 | 5.70 | 199.1 | 80.0 |
| 4 | 3290 | 23.89 | 13.99 | 334.2 | 8.10 | 273.4 | 81.8 |
| 5 | 3171 | 23.88 | 17.74 | 423.6 | 10.50 | 341.6 | 80.6 |
| 6 | 3057 | 23.84 | 21.45 | 511.4 | 12.90 | 404.6 | 79.1 |
| 7 | 2948 | 23.82 | 25.20 | 600.3 | 15.30 | 462.8 | 77.1 |
| 8 | 2838 | 23.82 | 28.91 | 688.6 | 17.70 | 515.4 | 74.8 |
| 9 | 2720 | 23.77 | 33.02 | 784.9 | 20.20 | 563.7 | 71.8 |